
Wedge Shroud 01


Roundel Shroud 02


Square Shroud 03

These installation instructions valid with the above Ametrix styles.

Large 30 1/2" INDOOR/OUTDOOR SSRxx

(Shroud, Remote)

Warning: Before starting any work ensure that all sources of power are turned off. All work must meet local/national codes and be performed by a certified electrician.

Exploded View and Part Call-out

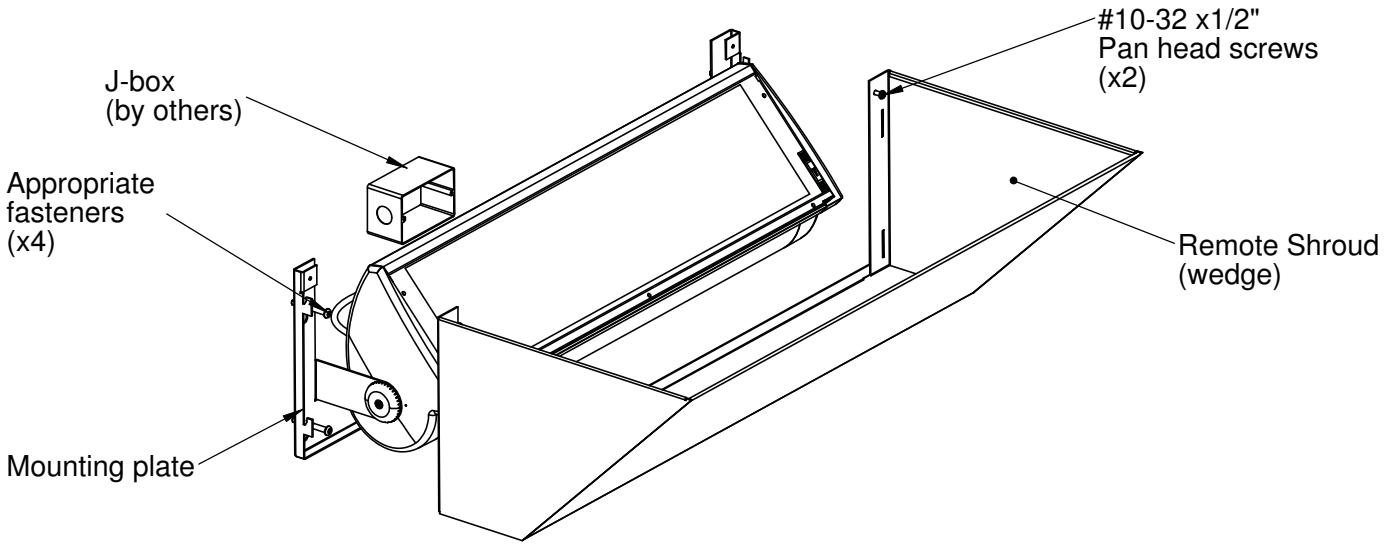

Attention:
Additional bracing/ structure may be required to support fixture.

1 Mounting Fixture to Surface

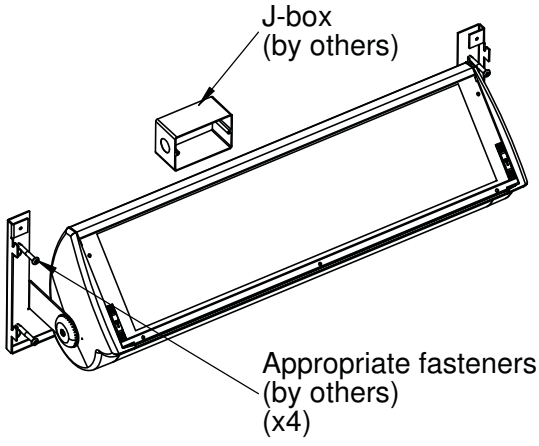

1. Using dimensions provided on page 2, secure fixture over j-box using appropriate fasteners.

2 Wiring Fixture

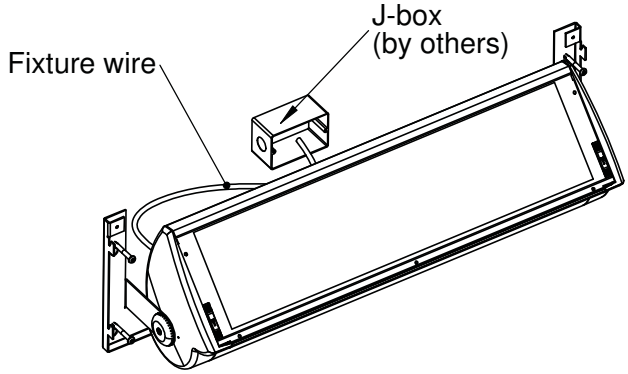

1. Depending on location, it may be easier to wire fixture prior to mounting. Attach appropriate wires and ensure all connections are properly matched.
2. Seal J-box(by others)

Ametrix
4675 Holly Street
Denver, CO 80216
P: 303-393-1522
www.ametrixlighting.com

Cooper Lighting
1121 Highway 74 South
Peachtree City, GA 30269
P: 770-486-4800
www.cooperlighting.com


Wedge Shroud 01

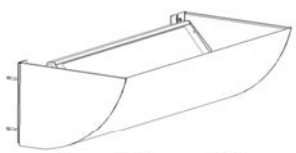
Round Shroud 02

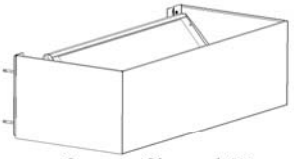
Square Shroud 03

These installation instructions are valid with the above Ametrix styles

Large 30 1/2" INDOOR/OUTDOOR SSRxx

(Shroud, Remote)

Warning: Before starting any work ensure that all sources of power are turned off. All work must meet local/national codes and be performed by a certified electrician. **Do not** mount fixtures vertically.

Securing Shroud to Fixture

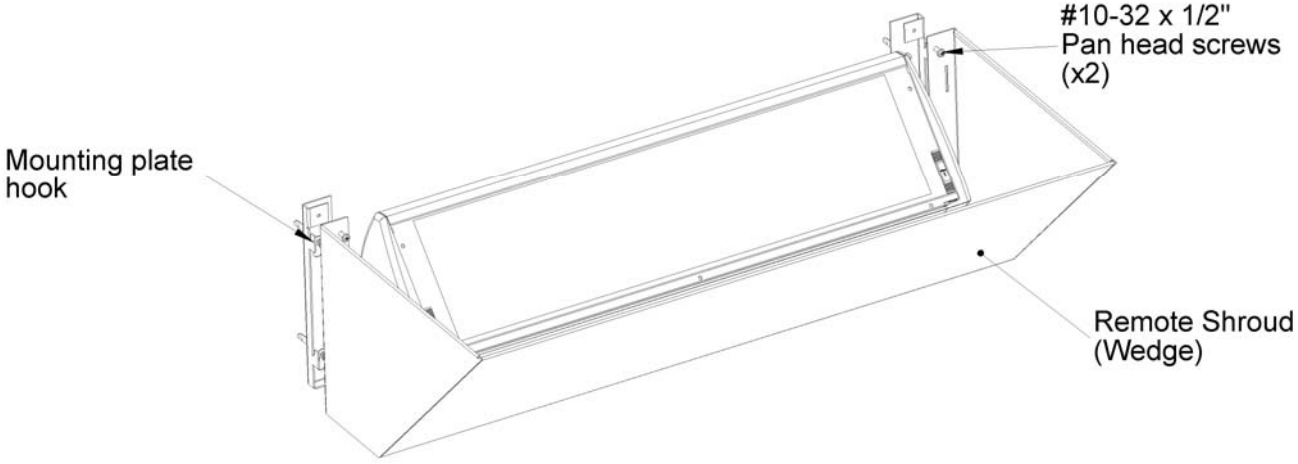

1. After wiring fixture and ensuring all connections have been properly matched, slide shroud over all four mounting plate hooks.
2. Secure shroud using both #10-32 x1/2" pan head screws.

Aiming the Fixture

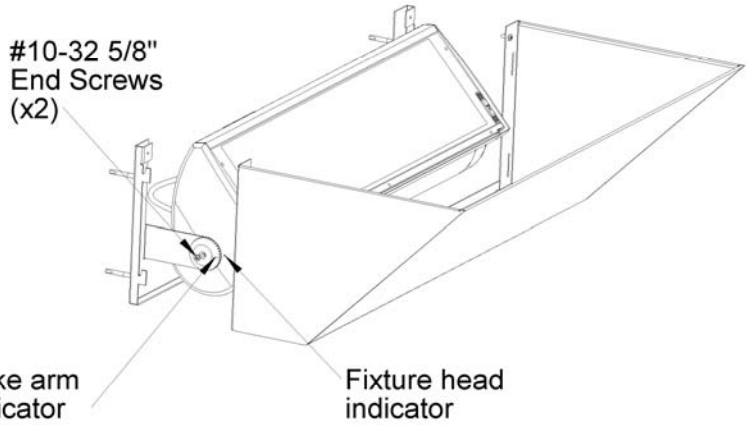

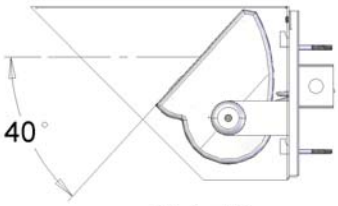

Side View

1. To aim fixture, loosen both #10-32 x5/8" end screws. When the PointGrab ™ system indicators are lined up, the slope of the lens face is 40-degrees. Each subsequent notch is an additional 10-degrees.
2. When the fixture head is adjusted to the desired angle, re-tighten end screws to secure the position.

Ametrix
4675 Holly Street
Denver, CO 80216
P: 303-393-1522
www.ametrixlighting.com

Cooper Lighting
1121 Highway 74 South
Peachtree City, GA 30269
P: 770-486-4800
www.cooperlighting.com


Wedge Shroud 01


Round Shroud 02


Square Shroud 03

These installation instructions are valid with the above Ametrix styles

Large 30 1/2" INDOOR/OUTDOOR SSRxx

(Shroud, Remote)

Warning: Before starting any work ensure that all sources of power are turned off. All work must meet local/national codes and be performed by a certified electrician. **Do not** mount fixtures vertically.

Mounting Plate Dimensions (In and mm)

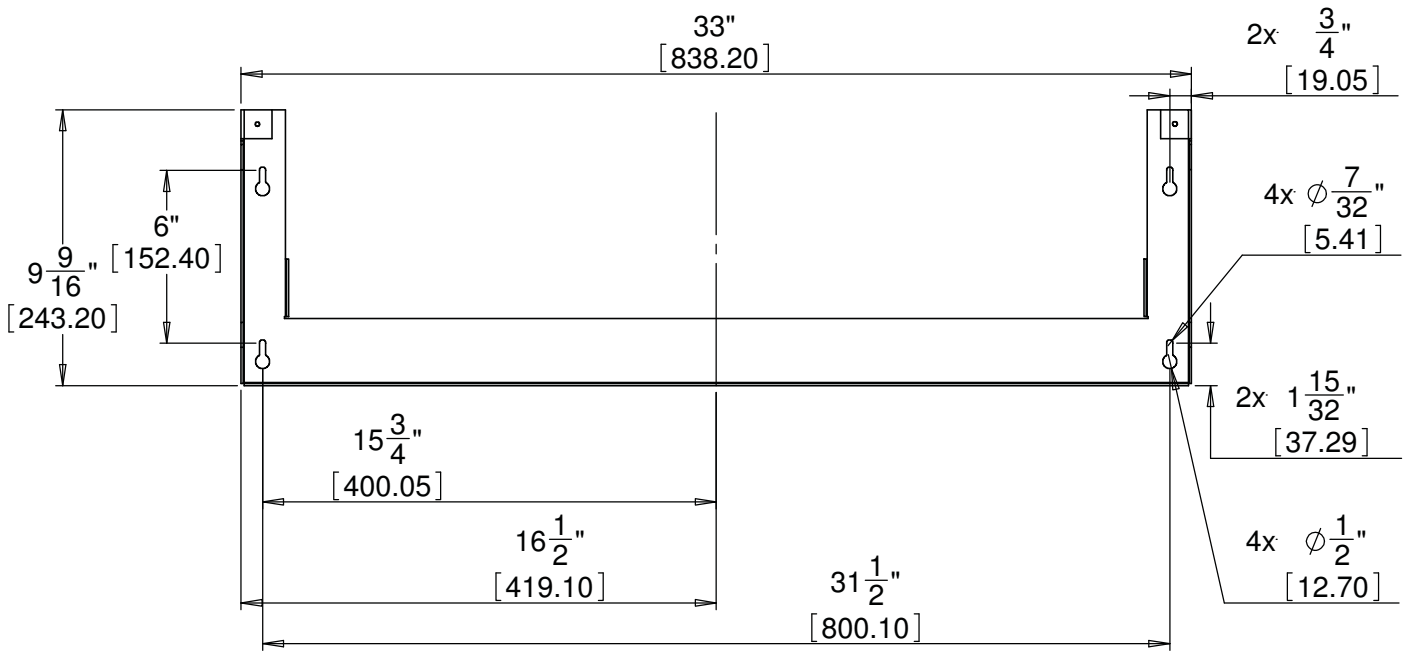

Lamping Size Chart

(lamps provided by others)

FIXTURE SIZE (inches/ mm)	WATTAGE	# OF LAMPS	LAMP TYPE	LAMP DESCRIPTION
30 1/2 / 774.7	36 W	1	T5	Twin Tube
30 1/2 / 774.7	40 W	1	T5	Twin Tube
30 1/2 / 774.7	50 W	1	T5	Twin Tube
30 1/2 / 774.7	55 W	1	T5	
30 1/2 / 774.7	36 W	2	T5	Twin Tube
30 1/2 / 774.7	40 W	2	T5	Twin Tube
30 1/2 / 774.7	50 W	2	T5	Twin Tube
30 1/2 / 774.7	55 W	2	T5	Twin Tube
30 1/2 / 774.7	250 W	2	ET18	Metal Halide
30 1/2 / 774.7	400 W	2	ET18	Metal Halide
30 1/2 / 774.7	900 W	1	T3	Halogen(Double Ended)
30 1/2 / 774.7	1000 W	1	T3	Halogen(Double Ended)

LAMP
(not to scale)

Ametrix
4675 Holly Street
Denver, CO 80216
P: 303-393-1522
www.ametrixlighting.com

Cooper Lighting
1121 Highway 74 South
Peachtree City, GA 30269
P: 770-486-4800
www.cooperlighting.com